

Observation analysis tool for the FREEWAT GIS environment for water resources management

Massimiliano Cannata¹, Jakob Neumann¹, Mirko Cardoso¹, Rudy Rossetto², Laura Foglia³,

¹ Institute of Earth Sciences, University of Applied Sciences and Arts of Southern Switzerland, Cannobio, Switzerland

² Scuola Superiore Sant'Anna, Pisa, Italy

³ Technischen Universität Darmstadt, Darmstadt, Germany

Corresponding Author:
Massimiliano Cannata¹

Email address: massimiliano.cannata@supsi.ch

Abstract:

The Observation Analysis Tool was developed for the FREEWAT GIS environment in order to integrate the data offered by state-of-the-art monitoring systems directly into numerical simulations for water resources management. Time-series are an important aspect of environmental modelling, and are becoming more available through the requirements of the water framework directive as well as more important with the advancement of numerical simulation techniques and increased model complexity. OAT enables time-series visualisation, pre-processing of data for model development, and post-processing of model results. The tool contains an expandable Python library of processes, incorporating a participatory approach to development. As well as processing MODFLOW results, OAT can act as a pre-processor for calibration observations, and will be expanded to incorporate its processing capabilities directly into the calibration process.

Introduction:

FREEWAT is an H2020 project seeking to promote water management and planning by simplifying the application of the Water Framework Directive 2000/60/CE (WFD) and other related directives. The WFD recognises modelling as a relevant activity for a range of applications, of which FREEWAT will aim to facilitate: testing hypothesis on conceptual models, validating scenarios to be included in River Basin Management Plans, water resource evaluation and forecasting, impact assessment of large engineering works, and evaluation of the effectiveness of proposed remediation activities. The WFD's requirement for increased monitoring activities on water quantity and quality led to an increased availability of data. An increased exploitation of information provided by the data would allow implementation of the directives in more efficient water management. Nevertheless, as found in Rossetto et al. (2015), very often the exploitation of the data up to now does not reflect information available within the data, which is often analysed with simple algorithms that do not provide insight into the dynamic systems. In the same paper (Rossetto et al. 2015) it was also suggest that decisions on water management and planning, that take into account the possibilities offered by state-of-the-art ICT, should move beyond the geographically lumped, 20 year average water budget management approaches to consider the fine spatial and temporal variability of hydrological systems and variables. For these reasons one of the FREEWAT modules is the Observation Analysis Tool (OAT): a time-series pre- and post-processor and visualization tool.

Background and Motivation:

The Observation Analysis Tool (OAT) is a module of the FREEWAT GIS plugin aimed at simplifying the processing and manipulation of time-series data to ease its exploitation for water quality and quantity management. The idea is to achieves this in the FREEWAT framework specifically through: (i) the pre-processing of time-series data to drive the implementation and analysis of conceptual and numerical models for Water resource Management (WRM) and (ii) the preparation of numerical model input data. Furthermore, enabling the visualisation and post-processing of model results may support management decisions. Raw digital time-series data available through monitoring networks, meteorological services or environmental authorities are always subject to pre-processing: specific to the temporal discretisation of the model, which in itself is subject to the end goal of modelling, and the possible spatial relationship to the area of interest. There's therefore a need of a tool designed to use time-series data processing to help in the

preparation of model input data and in the statistical analysis of observations and model results, all within the same GIS platform.

In addition to what previously described we can underline how any simulation model, and more specifically any hydrologic or groundwater model, aimed at providing WRM relevant information, requires quantitative data which defines the physical properties of the study area and describes its temporal evolution. This to define the system conditions, characteristics and resource exchanges. To that, identifying data needs, as well as collecting data is an essential part of any WRM related task. This tool for time-series analysis should therefore helps in handling this kind of data, which in spatio-temporal simulation models are: inputs for model conceptualization and implementation, outputs data for validation and observation data for sensitivity analysis, optimization, uncertainty analysis and prediction. In the context of FREEWAT and specifically groundwater modelling using MODFLOW-2005, time-series data can be climate data such as rainfall and temperature, boundary conditions such as surface water stages or discharge measurements, or pumping and irrigation rates among others. Observations used for model optimisation can also take the form of time-series data.

Method:

OAT is a Python package which is integrated in the FREEWAT environment through an interface exposing its features to modellers and non programmer users. OAT library implements two main classes: the Sensor class that is designated to handle time-series data and metadata and the Method class which is designated to represent a processing method. The library applies the behavioral visitor pattern which allows the separation of an algorithm from the object on which it operates: thanks to this design pattern it is possible to add a new processing capability by simply extending the Method class without the need to modify the Sensor class. From a dependency point of view, OAT takes advantage of the PANDAS, NUMPY and SCIPY packages.

The Sensor class took inspiration from the Sensor Observation Service standard and its istSOS implementation (Cannata et. al., 2015), with a specific simplification to ease its usage. Each Sensor object is characterized by a single time-series that is represented by a data section consisting in a PANDA's time-series and a location/metadata section.

The general structure and implemented usage of the library in FREEWAT is depicted in Figure 1.

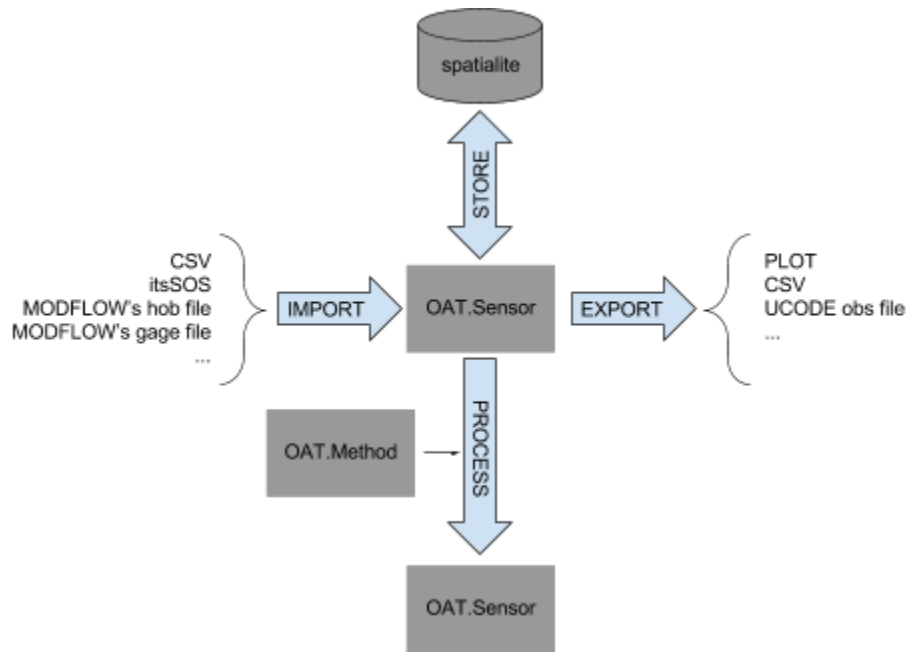


Figure 1 The OAT data retrieval, processing, storage and export workflow

Every OAT.Sensor object can be stored in a spatialite DB and re-loaded back in OAT.Sensor with its own data and metadata. For each sensor, the “metadata section” includes name, description, location (lat, lon, elev), unit of measure, observed property, coordinate system, time-zone, frequency, weight statistic and data availability (time interval). The “data section” contains time, data, name, and quality index, as well as a tag marking whether or not an individual observation in the series will be used. In addition to requesting sensor data from an istSOS server, OAT can retrieve data stored in local files or databases into the FREEWAT GIS environment for further use. Further input accepted format may be implemented in the future.

Most of the currently available OAT.Method objects are based on TSPROC processing capabilities (Westenbroek et al. 2012). They enable the analysis of raw data (resampling, regularization, data interpolation, fitting, filling, validation and data quality assessment); decomposition or filtering of time-series (low, medium, high frequencies); aggregation and exceedance-time calculation, summary statistics and period statistics, integration and hydrograph separation among others. The results of a process is generally a new OAT.Sensor, so that processes can be concatenated, and the final resulting time-series can be saved in the FREEWAT model database or exported. As discussed in the package design, this library of processes is open and expandable to incorporate users needs, specifically as an aspect of the participatory approach adopted in FREEWAT development.

In preparation for model input the raw data processing capability of OAT are particular important. In fact, since often available data will not have the same temporal discretisation as the chosen modelling time, various filter and resampling or data fill methods are available to create new, but statistically sound, time-series to be used as model input.

OAT incorporates the post-processing of model results by creating sensors with appropriate temporal discretisation for the visualisation and further processing of model results as time-series. MODFLOW head and flow observations, listing file volumetric budget components (either as cumulative budgets

or rates), and gage file components are currently supported formats. Time-series visualisation is achieved through the Python Matplotlib module. Various elements of the volumetric water budget for a MODFLOW model can be loaded as sensors and visualised and compared, to other elements of the budget or to other relevant time-series or observations.

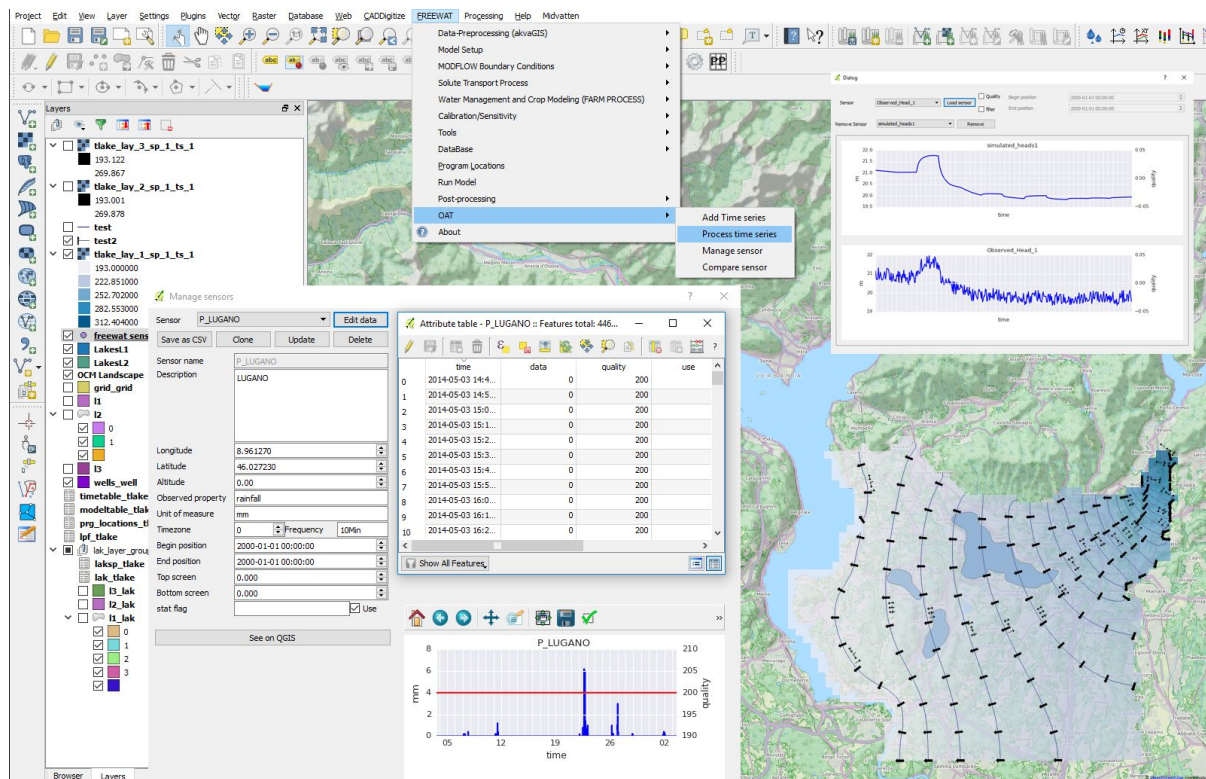


Figure 2 Screenshot of the OAT menu in a sample simulation within QGIS showing the “Manage sensor” and “Compare sensor” interfaces.

Groundwater head observations can be incorporated into the standard MODFLOW head observation package using OAT and simulated heads can be uploaded from the model results. Specifically for transient models with longer and possibly non continuous observation periods, OAT offers improved visualisation capabilities because the observations are separated by well and correctly plotted along the time axis so that is possible to true to time with variable spacing along the x-axis, rather than just sequentially, which allows their comparison with other time-series, e.g. nearby GW stresses.

Conclusion:

OAT offers an important supplement to the FREEWAT environment through the dedicated analysis of time-series data, simplifying the use of the increased data available due to the WFD. Pre- and post-processing capabilities are designed specifically for WRM conceptual and numerical models within the current modelling environment, with easily expandable libraries to always offer relevant processing capabilities as FREEWAT incorporates additional modelling capabilities. Currently OAT can be used to plot and process MODFLOW inputs as well as results from the observation, listing and gage files.

Ultimately OAT will allow new calibration possibilities by acting as an observation pre-processor for optimisation. Model optimisation for processed time-series, such as baseflow or exceedance probabilities, will allow the modeller to focus the optimisation on a particular aspect of model performance based on its intended use, or on extreme situations like flood risk or drought situations. As FREEWAT incorporates additional capabilities for WRM simulation, OAT features will be able to act as a toolbox for many aspects of model optimisation and analysis.

Acknowledgements

This paper is presented within the framework of the project FREEWAT, which has received funding from the European Union's Horizon 2020 research and innovation programme under Grant Agreement n. 642224.

References:

- Cannata, M., Antonovic, M., Molinari, M., & Pozzoni, M. (2015). istSOS, a new sensor observation management system: software architecture and a real-case application for flood protection. *Geomatics, Natural Hazards and Risk*, 6(8), 635-650.
- European Community. (2000). Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 establishing a framework for Community action in the field of water policy. *Official Journal of the European Parliament*, L327(September 1996), 1–82. <http://doi.org/10.1039/ap9842100196>
- Hunter, J.D. (2007) Matplotlib: A 2D Graphics Environment, *Computing in Science & Engineering*, 9, 90-95, [DOI:10.1109/MCSE.2007.55](https://doi.org/10.1109/MCSE.2007.55)
- McKinney, W. (2010). Data Structures for Statistical Computing in Python, Proceedings of the 9th Python in Science Conference, 51-56
- QGIS Development Team, (2016). QGIS Geographic Information System. Open Source Geospatial Foundation Project. <http://qgis.osgeo.org>
- Rossetto, R., Borsi, I., & Foglia, L. (2015). FREEWAT: FREE and open source software tools for WATER resource management. *Rendiconti Online Della Società Geologica Italiana*, 35, 252–255. <http://doi.org/10.3301/ROL.2015.113>
- Van der Walt, S., Colbert, S. C., & Varoquaux, G. (2011). The NumPy Array: A Structure for Efficient Numerical Computation, *Computing in Science & Engineering*, 13, 22-30, [DOI:10.1109/MCSE.2011.37](https://doi.org/10.1109/MCSE.2011.37)
- Westenbroek, S. M., Doherty, J. E., Walker, J. F., Kelson, V. A., Hunt, R. J., & Cera, T. B. (2012). Approaches in highly parameterized inversion: TSPROC, a general time-series processor to assist in model calibration and result summarization. *U.S. Geological Survey Techniques and Methods*, (7-C7), 112.