

Oscillation of water table due to rainfall: an experience of modeling in GIS

Bianca Federici¹, Rossella Bovolenta¹, Dario Balestrero¹, and Roberto Passalacqua¹

¹DICCA, University of Genoa, Via Montallegro 1, 16145, Genoa, Italy

Corresponding author: Bianca Federici bianca.federici@unige.it

ABSTRACT

A physically-based Integrated Hydrological-Geotechnical model (IHG) able to assess the rainfall-induced landslide susceptibility was developed, refined and applied in GIS environment along the past years (Passalacqua, 2002; Federici et al., 2014; Bovolenta et al., 2016), showing its reliability. It is a useful instrument to landslide susceptibility evaluations and land-use planning over wide areas. The present paper focuses on the modeling of water table oscillation due to rainfall, comparing different hydrological models.

Keywords: water table, groundwater, landslide, GIS

INTRODUCTION

To analyze and predict rainfall-induced landslides many models have been proposed in literature. The soil is usually assumed isotropic and homogeneous or, at least, horizontal heterogeneity is accounted for (Iverson, 2000; Baum et al., 2002; Montrasio and Valentino, 2008). The water table is often modeled into a steady state, in other cases, physically based models are adopted (Montgomery and Dietrich, 1994; Wu and Sidle, 1995; Iverson, 2000; Baum et al., 2002; Qiu et al., 2007; Lu and Godt, 2008; Baum et al., 2010). Because the computational effort is considerable, those models are poorly suited to analyze wide areas. Moreover, the two-dimensional landslide simulation approach by the limit equilibrium method is often unsuited to full basin analyses and, furthermore, to kinematic phenomena with pronounced three-dimensional character.

The Authors have developed a physically-based Integrated Hydrological-Geotechnical model (IHG), allowing the determination of the phreatic table's oscillation and then the slope stability analysis by the method of Skepton and Delory (1957) applied to any pixel of the model (Passalacqua, 2002; Federici et al., 2014; Bovolenta et al., 2016). The results are rendered into raster maps.

The present paper focuses on the modeling of water table due to rainfall, comparing the IHG model with the groundwater flow model implemented in GRASS (*r.gwflow*).

MODELS AND DATA

The IHG model and the *r.gwflow* have been recently applied to the benchmark site of Mendatica, in Western Liguria. Mendatica is a village lying on the accumulation zone of a large relict landslide of about 250 hectares. The whole deposit is made up of several small bodies in active or quiescent landslide conditions, mainly reactivated because of intense rainfall events. Since 2006, investigations to support a more proper definition of the site's hydro-geological model have been conducted; they revealed an extremely heterogeneous composition of the soil deposit. The presence of areas with different permeability is responsible of a very complex underground hydrogeology, characterized by levels of groundwater at different depths, either interconnected or isolated.

The Digital Terrain Model and other cartographic data are available. The digital models of the bedrock and the average groundwater level were obtained, by Triangulated Irregular Network (TIN) interpolation, from scattered survey points and additional points set along the riverbeds (Figure 1).

The *r.gwflow* model available in GRASS GIS consists in a numerical calculation program for transient, confined and unconfined groundwater flow. It is based on Darcy's law and a finite volume discretization

allowing to consider homogeneous and anisotropic soils. The model calculates the piezometric head and the filter velocity field, starting from the raster maps illustrated in Figure 2, e.g. the hydraulic conductivity which is porosity dependent.

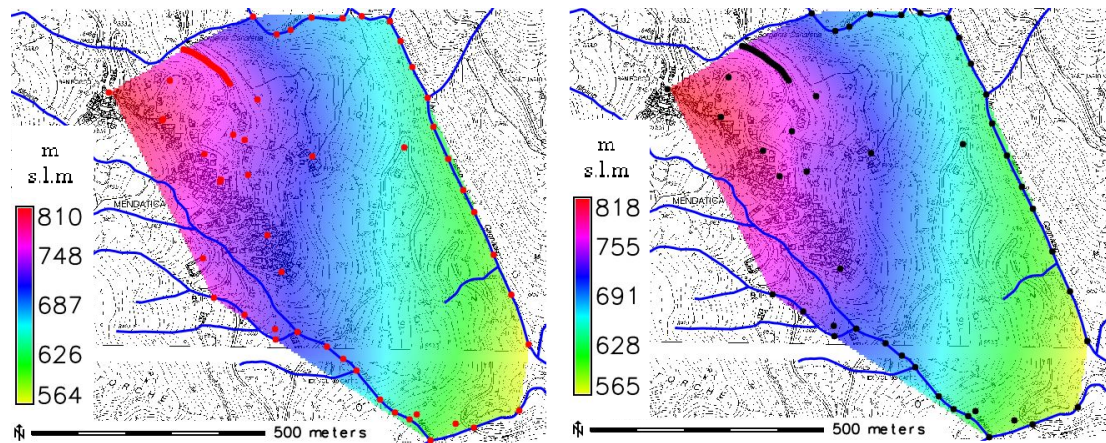


Figure 1. Digital model of the bedrock (left) and of the average groundwater table (right). The red dots represent the boreholes or emerging rock locations, the black ones show piezometers or wet riverbeds locations.

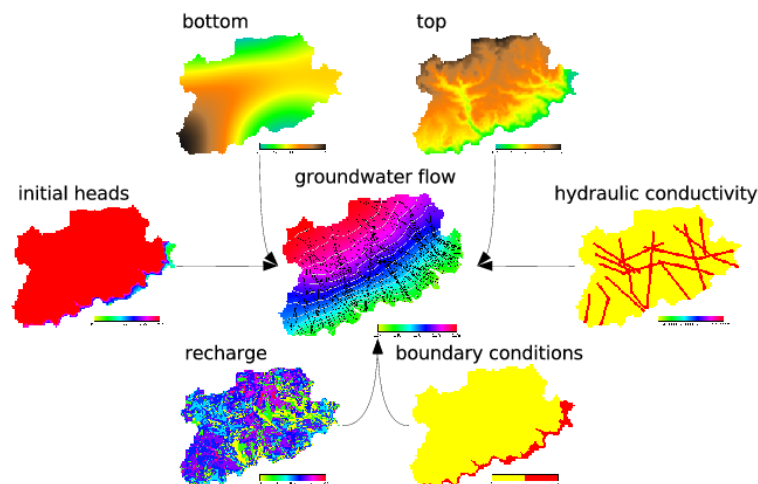


Figure 2. Workflow of *r.gwflow*.

The IHG model runs, for each unit cell, a hydrological balance based on the modified Curve Number (CN) method (SCS, 1972, 1975), in order to compute the evolution of groundwater level for any sequence of consecutive days of rain. It takes into account different soil moisture levels due to rainfall, using the equations provided by the SCS in function of the rainfall history of the previous days. It evaluates the CN for each cell and then the run-off, obtaining the infiltration quantity as difference. Then the IHG model treats each cell as an underground reservoir, with a maximum storage capacity equal to the potential maximum soil moisture retention (SCS, 1972, 1975). The reservoir is fed by the portion of rain infiltrated into the ground, and emptied by both the subsurface flow and the evapotranspiration.

The subsurface flow is described by an exponential discharge function of the reservoir, ruled by the hydraulic conductivity, the slope gradient and the drainage length of each cell. The evapotranspiration (ET) assessment is very expensive, hence, the approximate method of (Hargreaves and Samani, 1982) was implemented. It allows calculating the potential evapotranspiration (ETP) at standard conditions, as a function of air temperature only. At the moment the model doesn't considers the water lateral intakes, to overcome this, the Authors introduced also a "fictitious effective porosity", taking into account the

interconnected void spaces that contributes to fluid flow and implicitly taking into account, for each pixel, the lateral intakes due to the groundwater flow. In fact the values were calibrated starting from the oscillations measured by piezometers and they depend on the soil, the rain intensity and on the thickness of the saturable layer between the ground level and the average groundwater level.

The workflow of IHG model is illustrated in Figure 3.

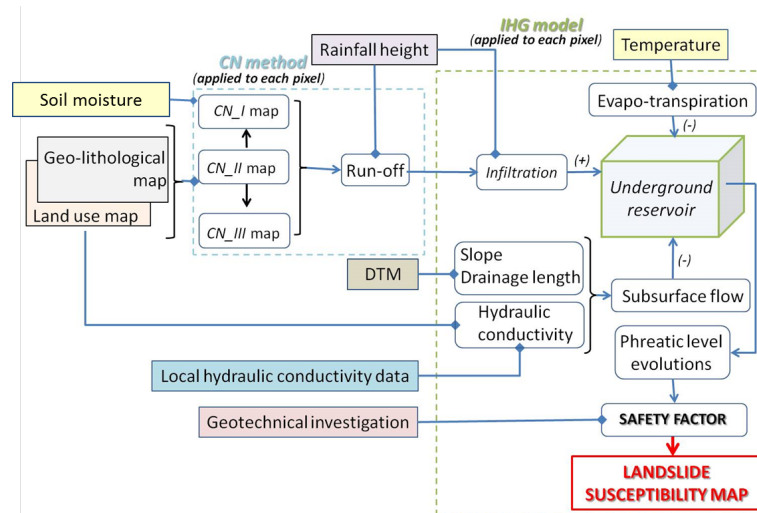


Figure 3. Workflow of IHG model.

COMPARISONS

The Authors applied the IHG and *r.gwflow* models to Mendatica site in relation either to an intense and to a moderate rain.

The models, although based on different theories, start from the same initial data (such as the raster maps of bedrock, average groundwater level and the rainfall) except for the porosity differently defined. The introduction into the IHG model of the fictitious effective porosity (Figure 4), spatially variable in function of the deposit's thickness, leads to outputs of IHG model more coherent to the site data, especially during intense rainfall events. In fact the phreatic table variation observed in the piezometers vary widely in time but also between neighboring points (Figure 5).

Figure 6 shows the 2D phreatic table variations with respect to the average groundwater level at the end of an intense rainfall event (from the 4th to the 15th of January 2008). Note that the IHG model produces greater values of the groundwater level variation, coherently with the piezometrical data measured in site.

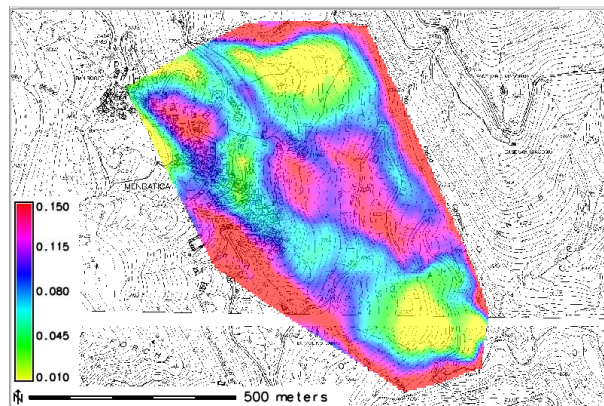


Figure 4. Fictitious effective porosity map for intense rainfall events.

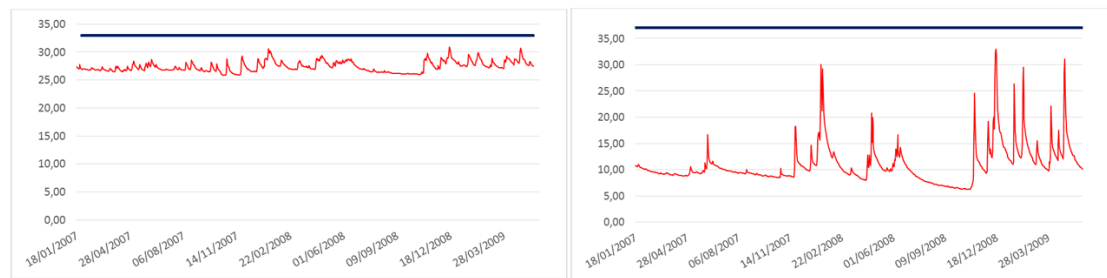


Figure 5. Example of phreatic table variations in time observed in two neighboring piezometers; the red and blues lines indicates the heights of water table and of ground surface with respect to bedrock respectively.

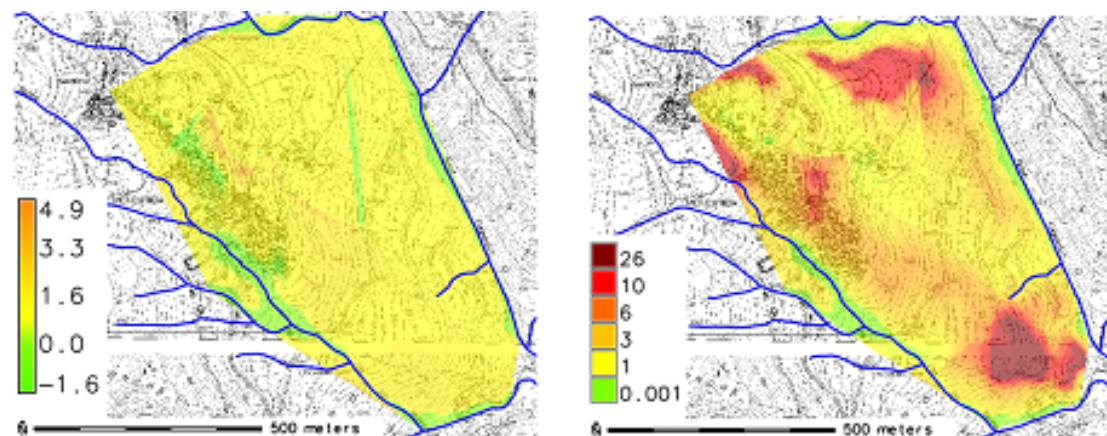


Figure 6. Groundwater level variations (in m) evaluated by *r.gwflow* (left) and IHG model (right).

CONCLUSIONS

The present paper has focused the attention on the modeling of water table oscillation, comparing the IHG model, proposed by the authors, with the *r.gwflow* model implemented in GRASS GIS. Their application to the complex underground hydrogeology of Mendatica site leads to outputs more coherent to the site data for the IHG model, especially during intense rainfall events, thanks to the fictitious effective porosity. A deeper comparison between the two models and with other ones will be performed in the near future.

ACKNOWLEDGMENTS

Thanks are due to the Technicians working for the Comune of Mendatica, who made available the full range of the data sets and offered their complete assistance during the Authors' terrain surveys/reckons.

REFERENCES

- Baum, R. L., Godt, J. W., and Savage, W. Z. (2010). Estimating the timing and location of shallow rainfall-induced landslides using a model for transient, unsaturated infiltration. *Journal of Geophysical Research: Earth Surface.*, 115.
- Baum, R. L., Savage, W. Z., and Godt, J. W. (2002). Trigrs-a fortran program for transient rainfall infiltration and grid-based regional slope-stability analysis. *USGS Open-File Report 0*, pages 2–424.
- Bovolenta, R., Passalacqua, R., Federici, B., and Sguerso, D. (2016). Lamp landslide monitoring and predicting for the analysis of landslide susceptibility triggered by rainfall events. In *12th International Symposium on Landslides (ISL2016)*, volume 2, pages 517–522.
- Federici, B., Bovolenta, R., and Passalacqua, R. (2014). From rainfall to slope instability: an automatic gis procedure for susceptibility analyses over wide areas. *Geomatics, Natural Hazards and Risk, Special Issue, ISSN:*, pages 1947–5713.

- 99 Hargreaves, G. H. and Samani, Z. (1982). Estimating potential evapotranspiration. *Journal of irrigation*
100 *and drainage engineering*, 108(3):223–230.
- 101 Iverson, R. M. (2000). Landslide triggering by rain infiltration. *Water Resources Research*, 36:1897–1910.
- 102 Lu, N. and Godt, J. (2008). Infinite slope stability under steady unsaturated seepage conditions. *Water*
103 *Resources Research*, 44.
- 104 Montgomery, D. R. and Dietrich, W. E. (1994). A physically based model for the topographic control on
105 shallow landsliding. *Water Resources Research*, 30(4):1153–1171.
- 106 Montrasio, L. and Valentino, R. (2008). A model for triggering mechanisms of shallow landslides. *Natural*
107 *Hazards and Earth System Sciences*, 8:1149–1159.
- 108 Passalacqua, R. (2002). Vulnerabilità territoriale da frane e crolli in roccia. In del Delfino Moro, E., editor,
109 *UE INTERREG II Project G.E.R.I.A., Dossier Tematico n 8, Collana Territorio e Ambiente*, pages 1–37.
- 110 Albenga (SV), –1, pp. 1-37. ISBN 8888397-05-1.
- 111 Qiu, C., Esaki, T., Xie, M., Mitani, Y., and Wang, C. (2007). Spatio-temporal estimation of shallow
112 landslide hazard triggered by rainfall using a three-dimensional model. *Environ Geol.*, 52:1569–1579.
- 113 SCS (1972). Hydrology. In *National Engineering Handbook - section 4, Soil Conservation Service - U.S.*
114 *Dept. of Agriculture, D.C. - USA*.
- 115 SCS (1975). Urban hydrology for small watersheds. *Tech. Rel. - Soil Conservation Service - U.S. Dept. of*
116 *Agriculture, Washington D.C. - USA*, 55.
- 117 Skepton, A. W. and Delory, F. A. (1957). Stability of natural slopes in london clay. In *Proc. 4th Int Conf.*
118 *Soil Mech.*, volume 2, pages 378–381.
- 119 Wu, W. and Sidle, R. (1995). A distributed slope stability model for steep forested basins. *Water Resources*
120 *Research*, 31(8):2097–2110.