

# A blockchain-based traceable and secure data-sharing scheme

Zhenqi Wang<sup>1</sup>, Shaopeng Guan<sup>Corresp. 1</sup>

<sup>1</sup> School of Information and Electronic Engineering, Shandong Technology and Business University, Yantai, Shandong, China

Corresponding Author: Shaopeng Guan  
Email address: konexgsp@gmail.com

The traditional data-sharing model relies on a centralized third-party platform, which presents challenges such as poor transaction transparency and unsecured data security. In this paper, we propose a blockchain-based traceable and secure data-sharing scheme. Firstly, we designed an attribute encryption-based method to protect data and enable fine-grained shared access. Secondly, we developed a secure data storage scheme that combines on-chain and off-chain collaboration. The InterPlanetary File System (IPFS) is used to store encrypted data off-chain, and the hash value of encrypted data is stored on the blockchain. To improve data security, Elliptic Curve Cryptography (ECC) encryption is performed before the hash value is stored. Finally, we designed a smart contract-based log tracking mechanism. The mechanism stores data sharing records on the blockchain and displays them in a visual form to meet the identity tracking needs of both data sharing parties. Experimental results show that our scheme can effectively secure data, track the identities of both parties sharing data in real-time, and ensure high data throughput.

# A blockchain-based traceable and secure data-sharing scheme

Zhenqi Wang and Shaopeng Guan\*

School of Information and Electronic Engineering, Shandong Technology and Business University, Yantai, China

Corresponding author:  
Shaopeng Guan

Email address: konexgsp@gmail.com

## ABSTRACT

The traditional data-sharing model relies on a centralized third-party platform, which presents challenges such as poor transaction transparency and unsecured data security. In this paper, we propose a blockchain-based traceable and secure data-sharing scheme. Firstly, we designed an attribute encryption-based method to protect data and enable fine-grained shared access. Secondly, we developed a secure data storage scheme that combines on-chain and off-chain collaboration. The InterPlanetary File System (IPFS) is used to store encrypted data off-chain, and the hash value of encrypted data is stored on the blockchain. To improve data security, Elliptic Curve Cryptography (ECC) encryption is performed before the hash value is stored. Finally, we designed a smart contract-based log tracking mechanism. The mechanism stores data sharing records on the blockchain and displays them in a visual form to meet the identity tracking needs of both data sharing parties. Experimental results show that our scheme can effectively secure data, track the identities of both parties sharing data in real-time, and ensure high data throughput.

**Keywords:** Blockchain, Data sharing, Data tracking, Smart contract, Interplanetary file system

## INTRODUCTION

Data is a collection of symbols that record objective events in various forms such as words, numbers, and images. With the rapid development of information technology, data generated by all walks of life has exploded, becoming an important resource for human society. However, due to different business requirements, data is often segmented and stored by different departments and individuals, resulting in numerous independent datasets. This prevents data from flowing freely, creating “data silos” (Lu et al., 2022), and resulting in low data utilization, hampering the value of data. Data sharing can make full use of data resources by sharing one’s data for others to use (Manzoor et al., 2021).

The traditional data-sharing model relies on a single third-party platform (Chen et al., 2019). The data owner uploads their data to the third-party platform, and the data demander pays the platform to obtain the data (Deepa et al., 2022). After the data-sharing is completed, the third-party platform pays the data owner a fee. This data-sharing model is easy to manage and maintain. However, data stored on a third-party platform is highly susceptible to tampering and resale, and the data owner will lose control of the data. Additionally, data-sharing records are the sole responsibility of third-party platform administrators and cannot provide data tracking capabilities for data owners, resulting in poor transaction transparency and lack of security (Wang et al., 2018).

Blockchain (Wang and Li, 2021) is tamper-proof, open and transparent, and leaves traces throughout the process. It uses a chronological “chain” structure to store data, and any attempt to tamper with the data will cause the blockchain to break. Furthermore, the data stored on the blockchain is jointly maintained by all parties. Any operation information related to the data can be stored on the blockchain to realize the whole trace management of the data (Zhu et al., 2019). Blockchain provides new ideas for solving the problems existing in the traditional data-sharing model.

At present, blockchain-based data-sharing solutions have been implemented in various areas such as electronic medical records, smart grids, and supply chains (Xia et al., 2017b; Kumar et al., 2022; Wan

et al., 2020). However, the open and transparent nature of the data stored in the blockchain makes it difficult to guarantee the security of the data (Zhu et al., 2019). Moreover, the inability to delete data on the blockchain and the continuous increase in data volume significantly affects the efficiency of data query and storage (Li et al., 2022).

To summarize, existing data-sharing schemes utilize blockchain technology to ensure tamper-proofing, transparency, and traceability of shared data. However, the transparency feature of blockchain creates a risk of data leakage as shared data is disclosed to everyone on the chain. Additionally, the expanding scale of shared data results in increasing storage pressure on the chain. To address these challenges, we propose a blockchain-based traceable and secure data-sharing scheme that not only enables secure storage of shared data but also reduces the pressure of data storage on the chain. Our main contributions are summarized as follows:

(1) We propose a data protection method based on attribute encryption. This method allows the data owner to customize the decryption authority of the encrypted data, enabling “one-to-many” encryption and decryption of shared data.

(2) We design a collaborative on-chain and off-chain data security storage scheme. The shared data is encrypted and stored off-chain in IPFS, and then the hash value of the shared data ciphertext is encrypted again and stored on the blockchain. This scheme not only protects data security but also relieves the pressure of data storage on the chain.

(3) We establish a visual data-sharing record system through smart contracts, which automatically stores data-sharing records on the blockchain and allows for identity tracking of both parties involved in the data-sharing process.

The rest of this paper is organized as follows: Section 2 presents the related work, Section 3 outlines the proposed scheme, Section 4 evaluates the scheme experimentally, and finally, Section 5 summarizes the work.

## RELATED WORK

Currently, blockchain-based data-sharing solutions have become a prominent area of research in various fields. One of the early works in this area is the Medical Data Sharing System (MedRec), which aimed to facilitate patient access to medical records across hospitals using blockchain technology (Azaria et al., 2016). However, MedRec uses a Proof-of-Work (PoW) protocol for consensus, which incurs high computational costs and latency. Another healthcare blockchain project, MedicalChain (Albeyatti, 2018) aims to provide a transparent and patient-centric system for sharing electronic health records in a secure and auditable environment. Building on MedRec and MedicalChain, Singh et al. (2020) proposed a blockchain lightweight access control scheme for electronic medical records, enabling patients to upload and query their medical records through a designed smart contract API interface. In other fields, Majdalawieh et al. (2021) proposed a blockchain-based data-sharing scheme for supply chains to ensure data security sharing and traceability requirements, Liu et al. (2020) proposed a blockchain-based framework for sharing data in the food supply chain. Yang et al. (2022) proposed a blockchain-based data sharing framework for industrial IoT that records all data sharing activities in a blockchain for secure data sharing and auditing. Additionally, Chenli et al. (2022) designed a blockchain-based data-sharing platform that uses smart contracts to control access to data stored on the blockchain. While these schemes ensure the integrity and immutability of shared data using blockchain technology, the open and transparent nature of blockchain poses a risk of data leakage.

Encryption algorithms are a direct and effective way to secure data on the blockchain (Zhaoliang et al., 2021; Zhong et al., 2022). Dong et al. (2020) proposed using the AES (Advanced Encryption Standard) symmetric encryption algorithm to encrypt shared food information and store it on the blockchain to improve information security and credibility. However, using the same key for encryption and decryption in the symmetric encryption algorithm poses a key leakage risk. Zheng et al. (2018b) suggested using key keeper applications and blockchain for secure data sharing in the cloud. The blockchain verifies permissions, and key keeper applications store the symmetric key used for encryption. The data owner distributes the encryption key to key keeper applications, and data requesters obtain the key from key keeper applications to decrypt data. Baralla et al. (2021) proposed a blockchain-based supply chain data-sharing scheme that uses the RSA (Rivest-Shamir-Adleman) asymmetric encryption algorithm’s public key for data encryption and a private key for decryption, reducing the key leakage risk. However, the RSA asymmetric encryption algorithm has low efficiency, which affects system performance. Park

et al. (2021) proposed the Medchain architecture, which uses proxy re-encryption to protect patient privacy. The patient's private data is re-encrypted by a cloud-based proxy server node, which is vulnerable to attacks and poses a single point of failure risk. Zhang and Lin (2018) proposed the use of searchable encryption to secure shared data stored on the blockchain. However, most searchable encryption schemes are based on bilinear pairing and Diffie-Hellman difficulty assumptions, which means a public key encrypted ciphertext can only be decrypted by a corresponding private key (Guo et al., 2021). Zheng et al. (2018a) proposed a secure data-sharing scheme based on homomorphic encryption, which exploits the feature that homomorphic encryption can operate directly on the ciphertext to reduce the total encryption and decryption overhead of the system. However, the homomorphic encryption algorithm's performance is slightly inferior to common encryption algorithms, which impacts the system's performance.

In addition, as the scale of data on the blockchain increases, the inability to delete data on-chain leads to storage pressure on the blockchain. To address this issue, Yang et al. (2021) proposed a dual storage structure scheme that combines a centralized database and blockchain. This scheme reduces storage pressure on-chain by storing data off-chain in the centralized database, while the blockchain stores the hash values of the data. However, centralized databases are not secure, and data is vulnerable to tampering and reselling. To improve the efficiency of data-sharing, several studies have combined blockchain with cloud computing (Al Omar et al., 2019; Kaur et al., 2018; Xia et al., 2017a). Raw data is stored in the cloud to reduce the storage pressure on-chain. Nevertheless, most cloud-based data sharing systems are prone to the "single point of failure" problem, and third-party cloud service providers are semi-trusted, making secure data-sharing a challenge. To enhance the security of off-chain data, Guo et al. (2020) proposed a master-slave blockchain architecture to store data. In this architecture, shared data is stored in the slave chain, while the hash value of the data is stored in the main chain to prevent tampering. However, this architecture requires cross-chain collaboration in data storage and query, and its efficiency is low. IPFS is a decentralized storage system that uses multiple nodes to store multiple copies of data, and during data query, multiple nodes read the files simultaneously (Nizamuddin et al., 2019), greatly improving the efficiency of data query. To this end, Ye and Park (2021) proposed using IPFS to store vehicle data off-chain and storing the hash value of the data on the blockchain to improve query efficiency. However, unauthorized users can still retrieve data from IPFS by obtaining the hash of the data from the chain.

The above shows that existing data sharing schemes ensure data security on the blockchain through symmetric or asymmetric encryption techniques. However, symmetric encryption algorithms require the transmission of keys in a secure network, which has high system security requirements. Asymmetric encryption algorithms use different encryption and decryption keys. An encrypted message with a public key can only be decrypted by the corresponding private key, and cannot achieve one-time encryption that multiple participants can decrypt. The overall cost of the system is high.

Attribute-based encryption mechanisms are considered the most appropriate solution to the problem of secure data-sharing (Sun et al., 2020). It identifies the user with a set of attributes, and if the user's attribute set matches the set required for ciphertext decryption, the user can decrypt the private key to recover the ciphertext to plaintext. This allows for "one-to-many" encryption and decryption of data and reduces the system overhead (Chen et al., 2022). However, in an attribute encryption system, multiple users with the same attribute set can exist in the system, which creates the possibility of unauthorized users decrypting data ciphertext.

To address the above issues, we propose using attribute-based encryption to protect shared data and achieve the "one-to-many" encryption and decryption requirements, where data encrypted by one user can be decrypted by multiple users, thus reducing the total encryption and decryption costs of the system. To reduce the storage pressure on the blockchain, the encrypted data is stored in IPFS and the hash value of the ciphertext is encrypted again using ECC encryption algorithm and stored on the blockchain to prevent unauthorized users from using the hash value on the chain to obtain the ciphertext and perform decryption operations.

## SCHEME DESIGN

### System model

In this paper, we propose a data-sharing scheme with the aim of improving data security and reducing storage pressure on the blockchain. The system architecture consists of four components as shown in Figure 1.

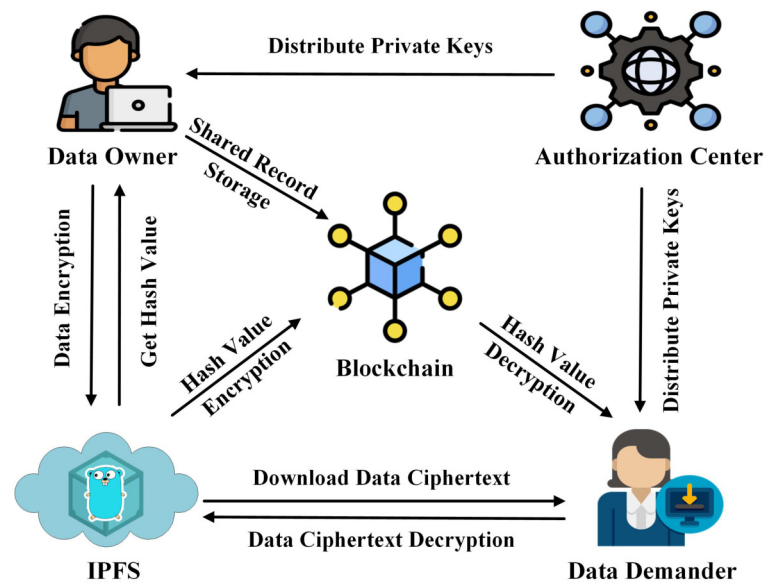


Figure 1. System architecture.

- IPFS: Provides off-chain storage services to data owners.
- Authorization center: Generates the required parameters and keys for the data owner and the data demander.
- Data owner: Performs attribute encryption operation on data, transmits the data ciphertext to IPFS, and obtains the hash value of the ciphertext.
- Blockchain: Performs ECC encryption on the hash value of the off-chain data ciphertext and records the identity information of both parties involved in the data-sharing to generate a data-sharing log record.
- Data demander: Obtain the encrypted hash value of the data ciphertext from the blockchain, download the data ciphertext from IPFS by decrypting the hash value, and finally restore the original data through attribute decryption.

### Data protection method based on attribute encryption

Ensuring secure storage of data is a prerequisite for data-sharing. Symmetric encryption schemes are susceptible to key leakage, while asymmetric encryption schemes suffer from the problem of large encryption and decryption time overhead. Attribute encryption extends asymmetric encryption algorithms, which not only addresses the issue of key leakage in symmetric encryption schemes, but also allows the attribute private key generated for a user to meet the "one-to-many" encryption and decryption requirements. This means that the data encrypted by one user can be decrypted by multiple users, reducing the overall overhead of encryption and decryption. The formal definition of attribute encryption consists of the following four algorithms (Bethencourt et al., 2007):


(1)  $Setup(1^\lambda, U) \rightarrow (GP, MSK)$ : The authorization center sets the security parameter  $\lambda$  and the global attribute set  $U$ , and generates the required public parameter  $GP$  and master key  $MSK$  through the initialization function  $Setup$ .

(2)  $KeyGen(Au, MSK) \rightarrow SK$ : The user submits their attribute set  $Au$ , and the authorization center outputs the corresponding attribute private key  $SK$  for the user through the  $KeyGen$  key generation function and the master key  $MSK$ .

(3)  $Encrypt(M, GP, T) \rightarrow CH$ : The data encryption user sets the access structure  $T$  and provides the public parameter  $GP$  and the data to be encrypted  $M$ . Then, the encryption function  $Encrypt$  is executed to generate the data ciphertext  $CH$ .

(4)  $Decrypt(SK, Au, CH) \rightarrow M$ : The decryption user uses the attribute private key  $SK$  and attribute set  $Au$  as inputs to the decryption function  $Decrypt$ , which then restores the ciphertext  $CH$  to the original data  $M$ .

In the attribute encryption system, the access structure specifies which users corresponding to the attribute set can decrypt the data ciphertext. If a user's attribute set satisfies the attribute set specified in the access structure, then the private key corresponding to this user's attribute can successfully decrypt the ciphertext. Therefore, we utilize the attribute encryption method to secure the data under the chain, achieving the "one-to-many" encryption and decryption requirements. The flowchart for the off-chain data protection method based on attribute encryption is illustrated in Figure 2.

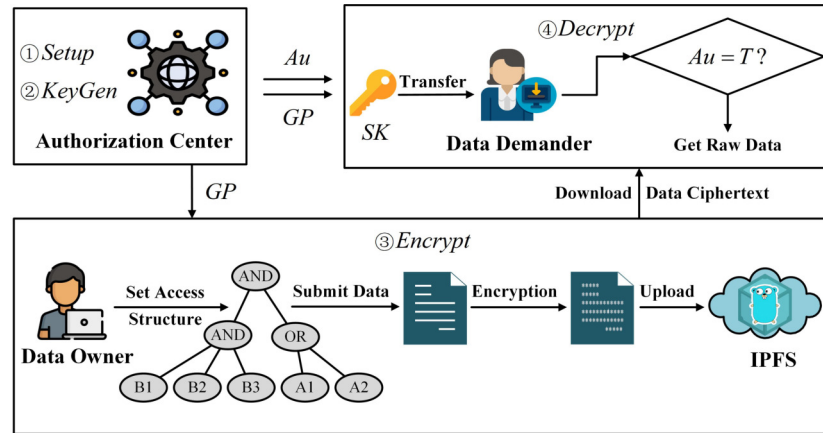

**Figure 2.** Design of data protection method based on attribute encryption.

First, the authorization center generates the required parameters through initialization operations. Then, based on the attribute set, the authorization center generates the attribute private key for the data demander. The data owner customizes the access structure, specifying the set of attributes required for ciphertext decryption by the data demander, and encrypts the data. Next, the data owner uploads the encrypted data ciphertext to IPFS, obtains the hash value of the data ciphertext for ECC encryption, and records the identity information of both parties of the data-sharing to the blockchain to generate a data-sharing log record. Finally, the data demander downloads the data ciphertext stored in IPFS through the decrypted hash value and decrypts it using its own attribute private key.

### On-chain and off-chain collaborative data security storage scheme

Although attribute encryption technology can fulfill the need for "one-to-many" data encryption and decryption, there is a risk of unauthorized data demanders being able to access the ciphertext of the data through the hash value, given that multiple data demanders with the same attributes can exist simultaneously in the system. To address this concern, we suggest encrypting the hash value of the ciphertext using the ECC encryption algorithm. This additional layer of encryption will safeguard the hash value of the ciphertext on the chain, thereby ensuring the security of the data.

ECC is a cryptographic system that relies on elliptic curves and the discrete logarithm problem. Compared to other encryption methods, ECC is known for its superior efficiency and can achieve a high level of encryption security with shorter keys. The elliptic curve  $E$  can be defined as (Koblitz et al., 2000):

$$E : y^2 + a_1xy + a_3y = x^3 + a_2x^2 + a_4x + a_5 \quad (1)$$

where  $a_i (i = 1, 2, 3, \dots, 5) \in K$  and  $\Delta \neq 0$ ,  $K$  represents the defined rational number field and  $\Delta$  is the discriminant of the elliptic curve equation:

$$\begin{cases} \Delta = -d_2^2d_8 - 8d_4^3 - 27d_6^2 + 9d_2d_6 \\ d_2 = a_1^2 + 4a_2 \\ d_4 = 2a_4 + a_1a_3 \\ d_6 = a_3^2 + 4a_5 \\ d_8 = a_1^2a_5 + 4a_2a_5 - a_1a_3a_4 + a_2a_3^2 - a_4^2 \end{cases} \quad (2)$$

212 When equation (2) is satisfied by the elliptic curve  $E$ , equation (1) is referred to as the Weierstrass  
213 equation (Falcão et al., 2018). By further simplifying equation (2), we can derive the general expression  
214 for the elliptic curve:

$$E : y^2 = x^3 + ax + b \quad (3)$$

215 where  $(a, b, x, y) \in Ep$ ,  $Ep$  is a finite field and  $p$  is a large prime number.

216 ECC encryption involves selecting an elliptic curve  $Ep(a, b)$  and choosing a point  $G$  on the curve as  
217 the base point. Next, a private key  $r$  is selected, and the corresponding public key  $R=rG$  is calculated,  
218 where  $R$  and  $G$  are points on the elliptic curve  $Ep(a, b)$ . To encrypt the plaintext, it is embedded into a  
219 point on the elliptic curve and the public key  $R$  is used to complete the encryption process. To decrypt the  
220 ciphertext, the private key  $r$  is utilized.

221 To protect data, it can be encrypted using the public key  $R$ , with higher efficiency for smaller amounts  
222 of data. As elliptic curves cannot be brute-force broken, ECC encryption provides a higher level of  
223 security at a lower computational cost. In light of the small data volume of the hash value and the high  
224 security requirement, we have opted to use the ECC encryption algorithm. In this study, we have utilized  
225 the key generation method from ECDSA (Elliptic Curve Digital Signature Algorithm) to produce the  
226 required public key  $R$  and private key  $r$  for ECC encryption. The specific process is shown in Algorithm 1.

---

**Algorithm 1** . Data security storage method for on-chain and off-chain collaboration.

---

- 1: Obtain the ciphertext hash value  $H_{CH}$  of the data returned by IPFS;
  - 2: Generating elliptic curves  $Ep(a, b)$ ;
  - 3: Obtain the elliptic curve group  $(x, y)$ ;
  - 4: **if** data owner encrypts ciphertext hash value  $H_{CH}$  **then**
  - 5:     The elliptic curve is obtained by equation (3), and  $y$  is obtained;
  - 6:     Get all the points that satisfy  $Ep(a, b)$ , and get the base point  $G(x_0, y_0)$ ;
  - 7:     Generate the private key  $r$  for the data demander and compute the public key  $R=rG$  using the base  
point  $G(x_0, y_0)$ ;
  - 8:     The data demander transmits its own public key  $R$  to the data owner;
  - 9:     The data owner encrypts the data hash  $H_{CH}$  using the public key  $R$  of the data demander;
  - 10:    Outputting the encrypted hash value ciphertext  $C$  and uploading it to the blockchain for storage;
  - 11:    The data demander decrypts the hash ciphertext  $C$  with his own private key  $r$  and obtains the  
decrypted hash value;
  - 12: **end if**
- 

227 Initially, the data owner obtains the hash value  $H_{CH}$  of the data ciphertext in IPFS (line 1). Next, the  
228 system initializes the elliptic curve, generates the elliptic group, and completes the encryption algorithm  
229 initialization (lines 2-3). All points that satisfy the elliptic curve  $Ep(a, b)$  are calculated based on Equation  
230 (3), and the base point  $G$  is obtained (lines 4-6). In the second step, the system generates the private key  $r$   
231 and public key  $R$  for the data demander, and the data demander sends their public key  $R$  to the data owner  
232 (lines 7-8). Finally, the data owner encrypts the hash value  $H_{CH}$  using the data demander's public key  $R$   
233 and stores the encrypted hash on the blockchain (lines 9-10). The data demander then decrypts the hash  
234 ciphertext on the blockchain using their private key  $r$  (line 11).

### 235 Smart contract-based log tracking mechanism

236 In a blockchain network, events are usually recorded in logs. As operational logs of the blockchain network  
237 are continually generated, displaying the logs visually can provide a more intuitive understanding of the  
238 entire process of events and enable identity tracking of both sides of data-sharing. Smart contracts (Wang  
239 et al., 2020), as an interface for interacting with the blockchain, have the characteristics of automatic  
240 execution and irrevocability, which facilitates the automatic storage and querying of data-sharing records.  
241 To this end, we have designed a smart contract-based log tracking mechanism that automatically stores  
242 data-sharing records on the blockchain through smart contracts and presents them in the form of visual  
243 logs. The smart contract's interface design is presented in Table 1.

244 Data owners and data demanders can upload and query data-sharing records by accessing the smart  
245 contract interface. The process of writing and querying data-sharing records is shown in Algorithm 2.

**Table 1.** Interface design of smart contracts.

Contract function	Contract logic	Contract method	Contract Description
User registration	Identity registration	userRegist()	The data owner or demander is registered in the system.
Data write	Hash value sent	hashSent()	The data owner sends the encrypted hash value of the off-chain data to the data demander.
	Hash value receive	hashReceived()	The data demander receives the encrypted hash value of the data owner's off-chain data.
Data query	Data owner query	querySent()	Data owners query data-sharing records on-chain.
	Data demander query	queryReceived()	Data demanders query data-sharing records on-chain.

**Algorithm 2.** Algorithm for writing and querying data-sharing records.

```

1: if (userRegist(object)) then
2:   The user registers successfully in the system and obtains an identity ID;
3:   The data owner chains down the encrypted data and obtains the hash value  $H_{CH}$  of the ciphertext  $CH$ ;
4:   Call Algorithm 1 to get hash ciphertext  $C$ ;
5: end if
6: if (hashSent(OwnerID,  $C$ , DemanderID)) then
7:   The data owner sends the encrypted hash value to the data demander;
8:   if (hashReceived(DemanderID,  $C$ , OwnerID)) then
9:     The data demander receives the encrypted hash value of the data owner;
10:    Returns the transaction ID and block height blockNum of this data-sharing event;
11:   end if
12: end if
13: if (querySent(transactionID)) then
14:   The data owner queries the data-sharing record according to the transaction ID;
15: end if
16: if queryReceived(transactionID) then
17:   The data demander queries the data-sharing record according to the transaction ID;
18: end if

```



First, the data owner and data demander register in the system (Lines 1-2). Then, the data owner uses Algorithm 1 to obtain the ciphertext of the encrypted data hash value (lines 3-5). When data-sharing is initiated between the data owner and the data demander, the blockchain records the identity information of both parties and the encrypted hash value, and returns the transaction ID of the data-sharing (lines 6-12). Finally, the data owner or data demander can query the data sharing record from the blockchain based on the transaction ID (lines 13-18).

## EXPERIMENTS AND ANALYSIS

### Experimental environment

In the experiments, we built the blockchain using Hyperledger Fabric (Kumar et al., 2021) and utilized IPFS as the storage platform under the chain. Table 2 shows the software configuration details of the experimental environment.


**Table 2.** Software configuration information of the experimental environment.

System component	Description
Virtual machine version	VMware15 pro
Hyperledger Fabric version	Hyperledger Fabric 2.4
IPFS version	IPFS 0.14.9
Smart contract language	Go 15.7
Computer CPU	Intel Core i5-10300H @ 2.50GHz
Memory	16 GB

We developed a user-friendly data-sharing and transmission system that connects with Hyperledger Fabric and IPFS through a web interface, based on the experimental environment configuration. This system allows data owners and data demanders to share data easily within the system.


### Off-chain data security experiment

During the data sharing process, data owners store data off-chain in various formats, including video, audio, images, and text. Taking a text file as an example, the encryption result of off-chain data is shown in Figure 3.

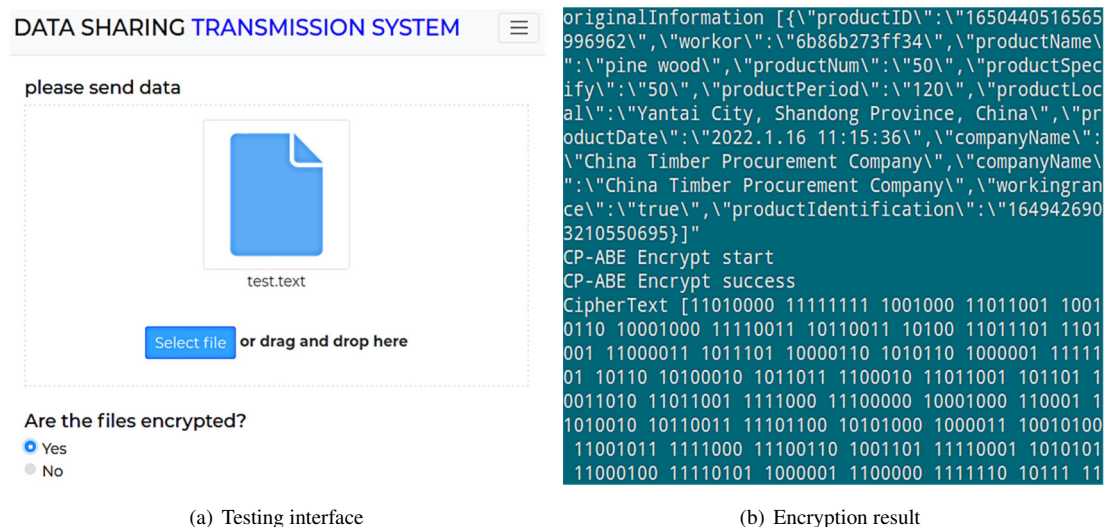

**Figure 3.** Encryption result of off-chain data.

Figure 3(a) shows the data encryption test interface, while Figure 3(b) displays the encryption result of a text file. As shown, enabling attribute-based encryption data protection method presents the shared data in ciphertext, effectively preventing the leakage of shared data under the chain. Moreover, the shared data encrypted by one data owner can be decrypted by multiple data demanders, achieving “one-to-many” encryption and decryption of shared data and reducing the system’s overhead of repeatedly encrypting data. Subsequently, the encrypted data is uploaded, and Figure 4 shows the hash value of the encrypted data returned by IPFS.

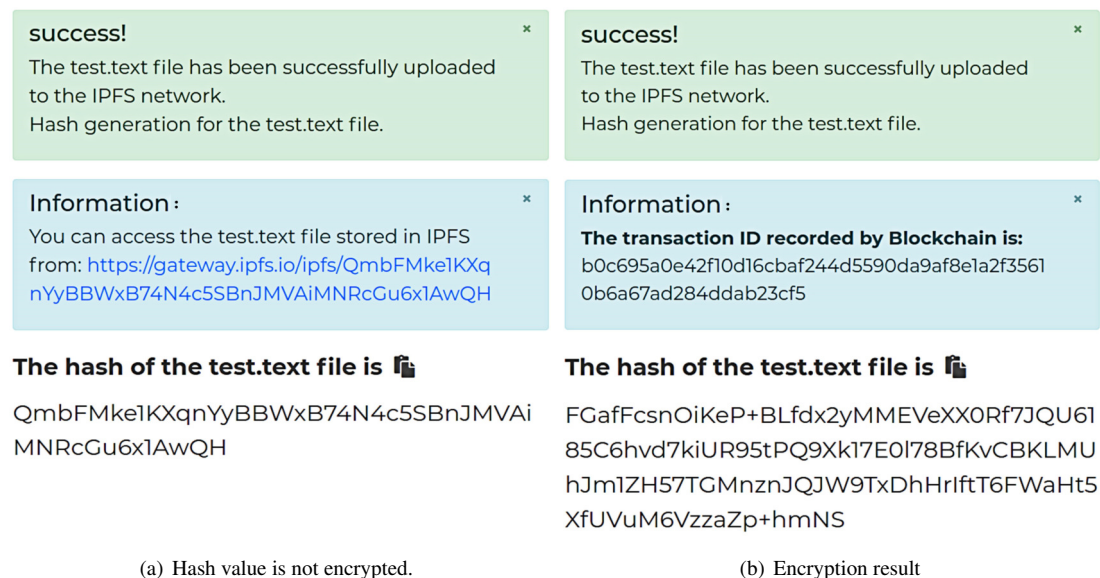

**Figure 4.** Comparison of the hash value of ciphertext before and after encryption.

Figure 4(a) displays the result of the unencrypted hash of the data ciphertext, while Figure 4(b) shows the result of the ECC encryption of the hash of the data ciphertext. In Figure 4(a), when the hash value is not encrypted, unauthorized data demanders can download the data ciphertext stored in IPFS directly via the hash value. If the set of attributes of this data demander matches the set of attributes required for the ciphertext decryption, they can decrypt the data ciphertext. In contrast, Figure 4(b) shows the encrypted hash value of the data ciphertext stored in IPFS in the form of ciphertext. The ECC encryption algorithm uses a public key for encryption and a private key for decryption. Only the data demander with the decryption private key can decrypt the hash value and obtain the ciphertext of the data in IPFS.




To track the identity of both parties involved in the shared data, we utilize smart contracts to automatically record and track the data-sharing process, and present it in the form of visual logs. Figure 5 shows an example of the visual log.

Figure 5 illustrates the visual log of each sharing record between the data owner and data demander. This log includes details such as the block number, the identity of the sharing parties, and the time of the sharing. This provides real-time tracking of the identities involved in the data sharing process. Additionally, to reduce the storage pressure on the chain, our scheme offloads the storage of shared data to off-chain platforms. Table 3 presents the storage space occupied by the shared data on the chain.

**Table 3.** Data space occupancy table.

Size of raw data	No off-chain storage solution	Proposed scheme
1MB	1MB	0.1MB
10MB	10MB	0.1MB
20MB	20MB	0.1MB
30MB	30MB	0.1MB
40MB	40MB	0.1MB

As presented in Table 3, the proposed on-chain and off-chain collaborative data security storage

Transaction ID:	e490a0c36f293c3733c811af7b9c77844eb2e093aface7635f5d588302cf2130 
Block:	6
Timestamp:	Sat, 23 Jul 2022 06:53:47 GMT
Identity of the data owner:	LS0tLS1CRUdJTiBQVUJMSUMgS0VZLS0tLS0KTUhh3d0RRWUpLb1pJaHZJTkFRRUJCUUFEYXdBd2FBShhBSzVlYk1OdWFSNkUxQ1FkTHNzcmJQMUhGVFQwRThULWpZVmVoZGhTS2U3YUUV1ODB6UDR1aDZsOUVFVEVndmc4MXPtVpRSWh6YkJsEI1MW56aHFWQXZnWUZ4UTUwcZnKCKNLZIGSGJLRDZpUzY4VFcx0dvK1RSL3Y2Q2UxKQVFKWVFRFRQUIKLS0tLS1FTkQgUUFVCTEIDIEtFWS0tLS0tCg== 
Identity of the data demander:	LS0tLS1CRUdJTiBQVUJMSUMgS0VZLS0tLS0KTUhh3d0RRWUpLb1pJaHZJTkFRRUJCUUFEYXdBd2FBShhBT2o5dXhGUS9iaXBQVWUzZWVzVUx5M2hEZ1RuY2VkNQpOR2JaZnpWShovM1hSQ1duWEhVQ3dMWXF4ZXZGV0pxUHNDZml4cHhRN1ZnMFY0UnNlT3RoTkNPWH02VFQ0cFBNCjRmZjBmUXpQTGM5U1ZxajE3WDI2cFqR1dzQ29uZGllkZ3dJREFRQUIKLS0tLS1FTkQgUUFVCTEIDIEtFWS0tLS0tCg== 

**Figure 5.** Shared records on the blockchain.

289 scheme can significantly decrease the occupancy rate of on-chain storage. Furthermore, the proposed  
 290 secure data storage solution occupies the same amount of space on the chain as the volume of raw data  
 291 increases. This is because only the encrypted hash of the data is stored on the chain, and the hash size  
 292 remains constant regardless of the amount of data stored off-chain (Kumar et al., 2021).

## 293 Performance analysis of the system


294 During the process of data-sharing, the system incurs performance overhead which mainly consists of  
 295 the execution cost of data encryption and decryption, and the transaction cost of the chain. We measure  
 296 these costs, including the encryption and decryption overhead of raw data, as well as the encryption and  
 297 decryption overhead of hash values. For instance, using the data in Table 3 as an example, we measure  
 298 the encryption and decryption overhead of the raw data, while the overhead of hash values encryption  
 299 and decryption is explained later. To ensure experimental data reliability, the experiment was executed  
 300 100 times and averaged, as depicted in Figure 6 and Figure 7 for encryption and decryption overhead of  
 301 original data, respectively. Additionally, to test the performance of the proposed scheme during encryption  
 302 and decryption of original data, it was compared to the schemes proposed by Dong et al. (2020) and Park  
 303 et al. (2021). Dong et al. (2020) proposed the use of AES symmetric encryption algorithm, while Park  
 304 et al. (2021) suggested the use of proxy re-encryption technique for data privacy protection. These two  
 305 schemes were proposed recently and are similar to the technical architecture of the proposed option.

306 In Figure 6 and Figure 7, it is evident that AES encryption and decryption incur the lowest execution  
 307 cost, while proxy re-encryption incurs the highest execution cost. This is mainly because the AES  
 308 encryption and decryption process uses a byte round-robin conversion operation, making the encryption  
 309 and decryption of original data relatively fast. However, since AES encryption and decryption utilize the  
 310 same key, data owners need to share the key with data requesters in advance, which can easily lead to key  
 311 leakage. On the other hand, the proposed scheme does not require sharing the key during original data  
 312 encryption and decryption, making it more secure. Furthermore, the proposed scheme is more efficient in  
 313 original data encryption and decryption compared to the proxy re-encryption technique. This is because  
 314 the proxy re-encryption technique needs to convert the ciphertext to different ciphertexts through a proxy  
 315 server for different data requesters to decrypt, which increases the implementation cost of the system.


316 Regarding the encryption and decryption overhead of hash values, we also measures it. The experiment  
 317 is executed 100 times to obtain the average value, and the results are presented in Table 4.

318 Based on Table 4, it can be observed that hash value encryption and decryption have a minimal impact  
 319 on the system's efficiency. The designed ECC encryption algorithm not only effectively protects the chain  
 320 hash values from leakage but also encrypts and decrypts the hash values without significantly reducing  
 321 the system's efficiency.

322 Data throughput refers to the number of transactions completed per second on the blockchain and

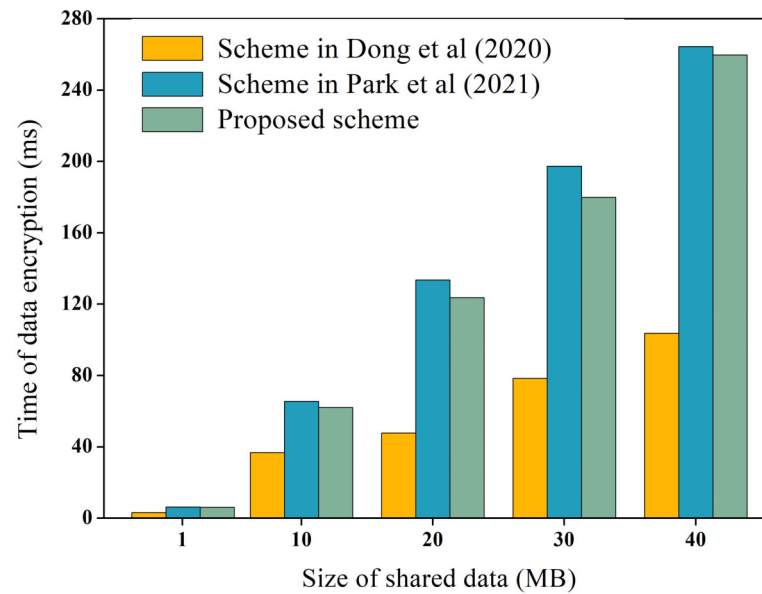

**Figure 6.** Encryption overhead of raw data.

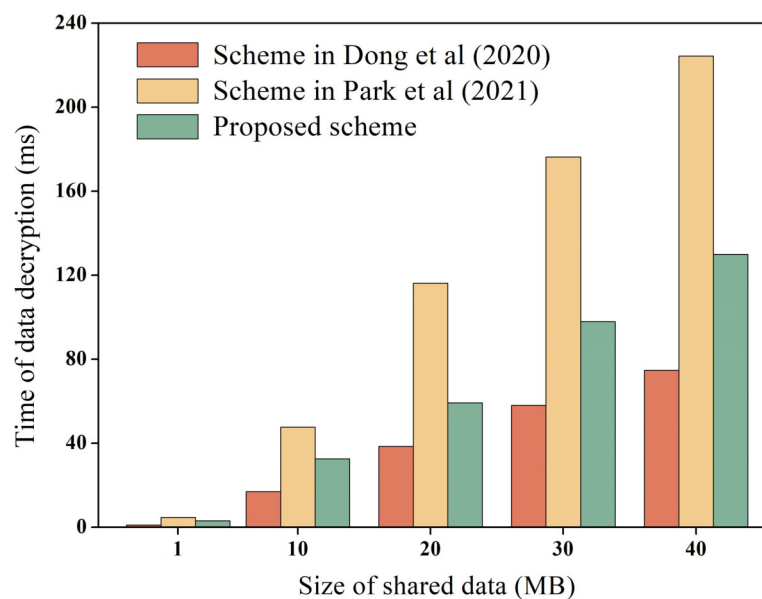


**Figure 7.** Decryption overhead of raw data.

**Table 4.** Encryption and decryption overhead of hash values.

Type	Proposed scheme
Encryption time	156.24 $\mu$ s
Decryption time	86.54 $\mu$ s

reflects the transaction cost overhead on the chain. In this study, we measured the throughput of shared data storage and query in the blockchain network and compared it with the scheme without under-chain storage and the Guo et al. (2020) scheme. Guo et al. (2020) proposes the use of a master-slave blockchain architecture to store data. Among them, the slave chain stores the shared data, and the master chain stores the hash of the data, which is similar to the architecture of the proposed scheme. To ensure the reliability of the experimental data, the experiment was repeated 100 times to obtain the average value, and the results are presented in Figure 8.

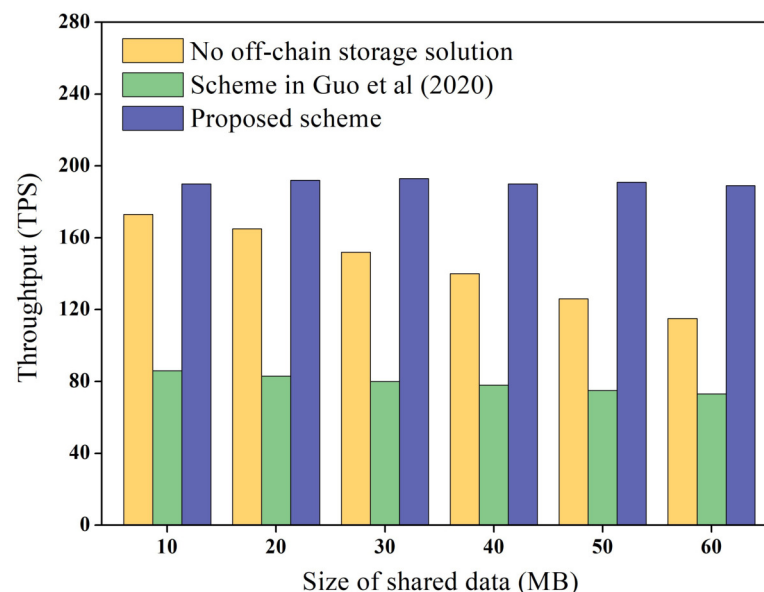

**Figure 8.** Data throughput experimental results.

Figure 8 demonstrates that the throughput of the scheme without under-chain storage gradually decreases as the data size increases, and the throughput in the Guo et al. (2020) scheme is even lower. Meanwhile, the throughput of the proposed scheme remains constant and is higher than that of the chainless under-storage scheme. This is because the Guo et al. (2020) scheme requires cross-chain operations between the master and slave chains during data storage and query, which unavoidably decreases the efficiency of blockchain storage and query. In contrast, the proposed scheme only stores the encrypted hash value, which is significantly smaller than the shared data directly on the chain. As a result, the proposed scheme has higher throughput.

### Data security comparison

We have compared our scheme with other related schemes with regards to off-chain data security, on-chain data security, data integrity, data tracking, trustfulness, authorization, authentication, reliability, and validation. The results are presented in Table 5.

**Table 5.** Comparison results of similar schemes.

Features	Our scheme	Zhang's scheme	Guo's scheme	Ye's scheme	Yang's scheme
Data integrity	Yes	Yes	Yes	Yes	Yes
On-chain data security	Yes	Yes	No	No	No
Off-chain data security	Yes	No	No	No	No
Data tracking	Yes	No	No	No	No
Trustfulness	Yes	Yes	Yes	Yes	No
Authorization	Yes	Yes	Yes	No	No
Authentication	Yes	No	Yes	No	No
Reliability	Yes	Yes	No	Yes	No
Validation	Yes	Yes	Yes	No	No

(1) Off-chain data security

Our data security protection method is based on attribute encryption, in which the data owner encrypts the original data by customizing the access structure to achieve fine-grained access control to the data off-chain, thereby enhancing data security.

(2) On-chain data security

We use the ECC encryption algorithm to store the data hash as a ciphertext on the blockchain. The data ciphertext can only be downloaded from IPFS if it is decrypted, preventing unauthorized access to the storage address of the data off-chain and enhancing on-chain data security.

(3) Data integrity

Our proposed collaborative data storage method encrypts and stores off-chain data in IPFS, which can be stored permanently. Moreover, the encrypted hash value stored on the chain cannot be tampered with, ensuring data integrity.

(4) Data tracking

Through the smart contract interface, data-sharing records are tamper-proof stored on the chain, allowing real-time tracking of the identity of both parties sharing data.

(5) Trustfulness

Our data security storage scheme stores shared encrypted data by IPFS, while the hashes of the encrypted data are stored by the blockchain. Based on the uniqueness of the hash value, data demanders can compare the hash value of the data under the chain with the decrypted hash value on the chain to verify whether the data is trustworthy, enhancing trustfulness.

(6) Authorization

Our scheme ensures that only authorized data demanders can decrypt the cryptographic hashes stored on the blockchain and download the data ciphertext stored in IPFS. Additionally, the data ciphertext can be decrypted only if the set of attributes of the data requester matches the set of attributes required for the decryption of the ciphertext, ensuring data confidentiality.

(7) Authentication

In our scheme, both data owners and demanders must be authenticated by the system to access the system. After authentication, the system provides keys. Our designed data tracking mechanism fully records shared data on the blockchain for easy accountability, ensuring system security.

(8) Reliability:

In this paper, we store the original data off-chain, and the uniqueness and irreversibility of the hash value ensures the reliability of the off-chain data, which is further guaranteed by the on-chain storage of cryptographic hash. The cryptographic hash of the data on the chain cannot be changed, ensuring the reliability of the data.

(9) Validation:

In this paper, the data stored on and off the chain is presented in ciphertext format. Unauthorized or unverified data demanders querying the blockchain for data will only get the hash ciphertext and will not be able to download the original data ciphertext stored in IPFS. Therefore, the original data ciphertext can only be decrypted by authorized parties, achieving on-chain and off-chain data verifiability.

It is evident that our solution not only ensures secure storage and sharing of data, but also enables tracking the identity of the data sharer.

## CONCLUSION

In this paper, we propose a traceable and secure data-sharing scheme based on blockchain technology. Our solution features a data protection method based on attribute encryption to enable fine-grained access control for shared data. To enhance data security, we employ a collaborative on-chain and off-chain data storage scheme, which also alleviates storage pressure on the chain. Additionally, we design a log mechanism based on smart contracts to facilitate identity tracking for both data sharers. Our proposed scheme is evaluated for performance and security, demonstrating higher data throughput and security, as well as lower data encryption and decryption overhead costs. Furthermore, it enables real-time identity tracking for both parties involved in data sharing, while ensuring data encryption protection both on and off the chain.



## FUNDING

The authors received no funding for this work.

## COMPETING INTERESTS

The authors declare there are no competing interests.

## REFERENCES

- Al Omar, A., Bhuiyan, M. Z. A., Basu, A., Kiyomoto, S., and Rahman, M. S. (2019). Privacy-friendly platform for healthcare data in cloud based on blockchain environment. *Future generation computer systems*, 95(15):511–521.
- Albeyatti, A. (2018). White paper: medicalchain. *MedicalChain self-publication*.
- Azaria, A., Ekblaw, A., Vieira, T., and Lippman, A. (2016). Medrec: Using blockchain for medical data access and permission management. In *2016 2nd international conference on open and big data (OBD)*, pages 25–30.
- Baralla, G., Pinna, A., Tonelli, R., Marchesi, M., and Ibba, S. (2021). Ensuring transparency and traceability of food local products: A blockchain application to a smart tourism region. *Concurrency and Computation: Practice and Experience*, 33(1):5857–5875.
- Bethencourt, J., Sahai, A., and Waters, B. (2007). Ciphertext-policy attribute-based encryption. In *2007 IEEE symposium on security and privacy (SP'07)*, pages 321–334.
- Chen, J., Yin, X., and Ning, J. (2022). A fine-grained and secure health data sharing scheme based on blockchain. *Transactions on Emerging Telecommunications Technologies*, 113(4):1–15.
- Chen, Y., Ding, S., Xu, Z., Zheng, H., and Yang, S. (2019). Blockchain-based medical records secure storage and medical service framework. *Journal of medical systems*, 43(1):1–9.
- Chenli, C., Tang, W., Gomulka, F., and Jung, T. (2022). Provenet: Networked bi-directional blockchain for data sharing with verifiable provenance. *Journal of Parallel and Distributed Computing*, 166(9):32–44.
- Deepa, N., Pham, Q.-V., Nguyen, D. C., Bhattacharya, S., Prabadevi, B., Gadekallu, T. R., Maddikunta, P. K. R., Fang, F., and Pathirana, P. N. (2022). A survey on blockchain for big data: approaches, opportunities, and future directions. *Future Generation Computer Systems*, 113(10):1–20.
- Dong, Z., Chen, J., Chen, Y., and Shao, R. (2020). Food traceability system based on blockchain. In *Proceedings of the 2020 International Conference on Aviation Safety and Information Technology*, pages 571–576.
- Falcão, M. I., Miranda, F., Severino, R., and Soares, M. J. (2018). Weierstrass method for quaternionic polynomial root-finding. *Mathematical Methods in the Applied Sciences*, 41(1):423–437.
- Guo, L., Yang, X., and Yau, W.-C. (2021). Tabe-dac: Efficient traceable attribute-based encryption scheme with dynamic access control based on blockchain. *IEEE Access*, 9(12):8479–8490.
- Guo, S., Wang, F., Zhang, N., Qi, F., and Qiu, X. (2020). Master-slave chain based trusted cross-domain authentication mechanism in iot. *Journal of Network and Computer Applications*, 172(7):102812–102823.
- Kaur, H., Alam, M. A., Jameel, R., Mourya, A. K., and Chang, V. (2018). A proposed solution and future direction for blockchain-based heterogeneous medicare data in cloud environment. *Journal of medical systems*, 42(8):1–11.
- Koblitz, N., Menezes, A., and Vanstone, S. (2000). The state of elliptic curve cryptography. *Designs, codes and cryptography*, 19(2):173–193.
- Kumar, R., Marchang, N., and Tripathi, R. (2022). Smdsb: Efficient off-chain storage model for data sharing in blockchain environment. In *Machine Learning and Information Processing*, pages 225–240. Springer.
- Kumar, R., Tripathi, R., Marchang, N., Srivastava, G., Gadekallu, T. R., and Xiong, N. N. (2021). A secured distributed detection system based on ipfs and blockchain for industrial image and video data security. *Journal of Parallel and Distributed Computing*, 152(6):128–143.
- Li, W., Zhou, Z., Fan, W., and Gao, J. (2022). Design of data sharing platform based on blockchain and ipfs technology. *Wireless Communications and Mobile Computing*, 2022(6):1–7.
- Liu, J., Sun, X., and Song, K. (2020). A food traceability framework based on permissioned blockchain. *Journal of Cybersecurity*, 2(2):107–115.

- Lu, Y., Li, P., and Xu, H. (2022). A food anti-counterfeiting traceability system based on blockchain and internet of things. *Procedia Computer Science*, 199(3):629–636.
- Majdalawieh, M., Nizamuddin, N., Alaraj, M., Khan, S., and Bani-Hani, A. (2021). Blockchain-based solution for secure and transparent food supply chain network. *Peer-to-Peer Networking and Applications*, 14(6):3831–3850.
- Manzoor, A., Braeken, A., Kanhere, S. S., Ylianttila, M., and Liyanage, M. (2021). Proxy re-encryption enabled secure and anonymous iot data sharing platform based on blockchain. *Journal of Network and Computer Applications*, 176(4):102917–102972.
- Nizamuddin, N., Salah, K., Azad, M. A., Arshad, J., and Rehman, M. (2019). Decentralized document version control using ethereum blockchain and ipfs. *Computers & Electrical Engineering*, 76(9):183–197.
- Park, Y.-H., Kim, Y., Lee, S.-O., and Ko, K. (2021). Secure outsourced blockchain-based medical data sharing system using proxy re-encryption. *Applied Sciences*, 11(20):9422.
- Singh, A. P., Pradhan, N. R., Luhach, A. K., Agnihotri, S., Jhanjhi, N. Z., Verma, S., Ghosh, U., and Roy, D. S. (2020). A novel patient-centric architectural framework for blockchain-enabled healthcare applications. *IEEE Transactions on Industrial Informatics*, 17(8):5779–5789.
- Sun, J., Yao, X., Wang, S., and Wu, Y. (2020). Blockchain-based secure storage and access scheme for electronic medical records in ipfs. *IEEE Access*, 8(4):59389–59401.
- Wan, P. K., Huang, L., and Holtskog, H. (2020). Blockchain-enabled information sharing within a supply chain: A systematic literature review. *IEEE access*, 8(4):49645–49656.
- Wang, B. and Li, Z. (2021). Healthchain: A privacy protection system for medical data based on blockchain. *Future Internet*, 13(10):247–163.
- Wang, Y., Su, Z., Zhang, N., Chen, J., Sun, X., Ye, Z., and Zhou, Z. (2020). Spds: A secure and auditable private data sharing scheme for smart grid based on blockchain. *IEEE Transactions on Industrial Informatics*, 17(11):7688–7699.
- Wang, Z., Tian, Y., and Zhu, J. (2018). Data sharing and tracing scheme based on blockchain. In *2018 8th international conference on logistics, Informatics and Service Sciences (LISS)*, pages 1–6.
- Xia, Q., Sifah, E. B., Asamoah, K. O., Gao, J., Du, X., and Guizani, M. (2017a). Medshare: Trust-less medical data sharing among cloud service providers via blockchain. *IEEE Access*, 5(12):14757–14767.
- Xia, Q., Sifah, E. B., Smahi, A., Amofa, S., and Zhang, X. (2017b). Bbds: Blockchain-based data sharing for electronic medical records in cloud environments. *Information*, 8(2):44–60.
- Yang, L., Zou, W., Wang, J., and Tang, Z. (2022). Edgeshare: A blockchain-based edge data-sharing framework for industrial internet of things. *Neurocomputing*, 485(4):219–232.
- Yang, X., Li, M., Yu, H., Wang, M., Xu, D., and Sun, C. (2021). A trusted blockchain-based traceability system for fruit and vegetable agricultural products. *IEEE Access*, 9(5):36282–36293.
- Ye, H. and Park, S. (2021). Reliable vehicle data storage using blockchain and ipfs. *Electronics*, 10(10):1130–1145.
- Zhang, A. and Lin, X. (2018). Towards secure and privacy-preserving data sharing in e-health systems via consortium blockchain. *Journal of medical systems*, 42(8):1–18.
- Zhaoliang, L., Huang, W., and Wang, D. (2021). Functional agricultural monitoring data storage based on sustainable block chain technology. *Journal of Cleaner Production*, 281(5):124078–124087.
- Zheng, B.-K., Zhu, L.-H., Shen, M., Gao, F., Zhang, C., Li, Y.-D., and Yang, J. (2018a). Scalable and privacy-preserving data sharing based on blockchain. *Journal of Computer Science and Technology*, 33(3):557–567.
- Zheng, X., Mulkamala, R. R., Vatrappu, R., and Ordieres-Mere, J. (2018b). Blockchain-based personal health data sharing system using cloud storage. In *2018 IEEE 20th international conference on e-health networking, applications and services (Healthcom)*, pages 1–6.
- Zhong, C., Liu, K., Liang, Z., Huang, Y., Xiong, F., and Guo, Z. (2022). Research on data security sharing in blockchain: Challenges and prospects. In *2022 IEEE International Conference on Electrical Engineering, Big Data and Algorithms (EEBDA)*, pages 1322–1327.
- Zhu, L., Wu, Y., Gai, K., and Choo, K.-K. R. (2019). Controllable and trustworthy blockchain-based cloud data management. *Future Generation Computer Systems*, 91(5):527–535.